

FIG. 1

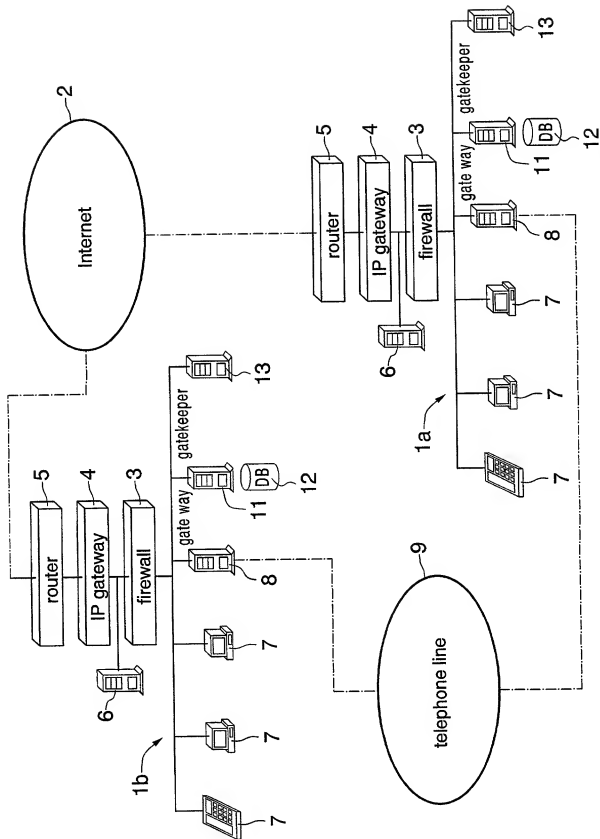


FIG. 2

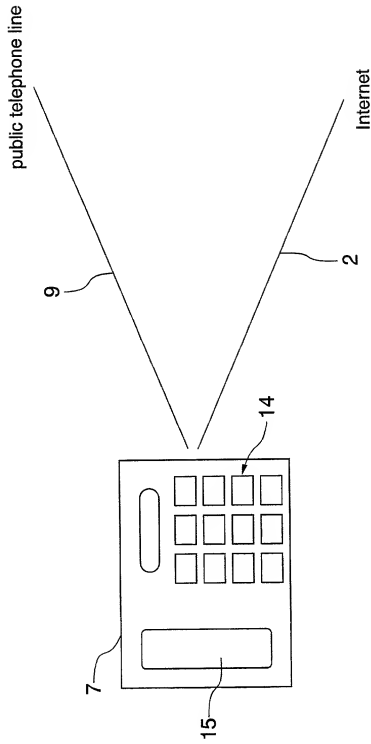


FIG. 3

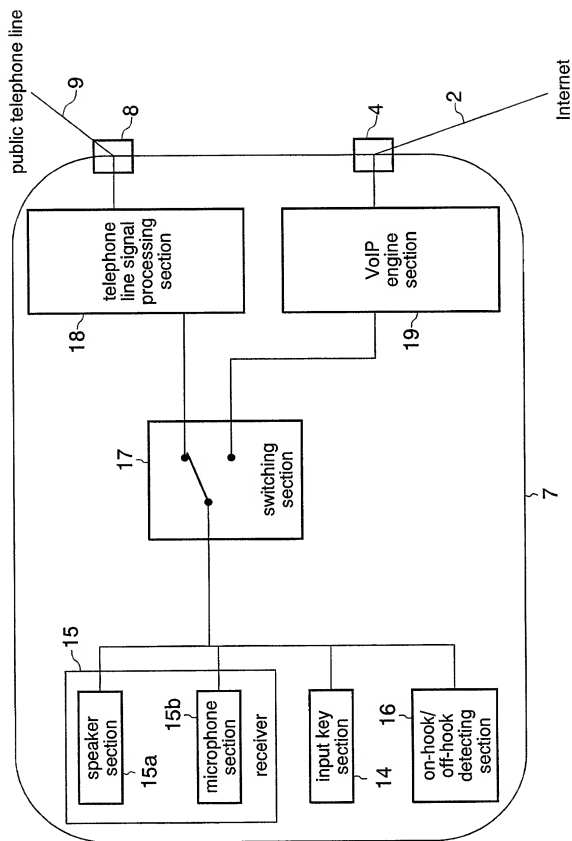


FIG. 4(a)

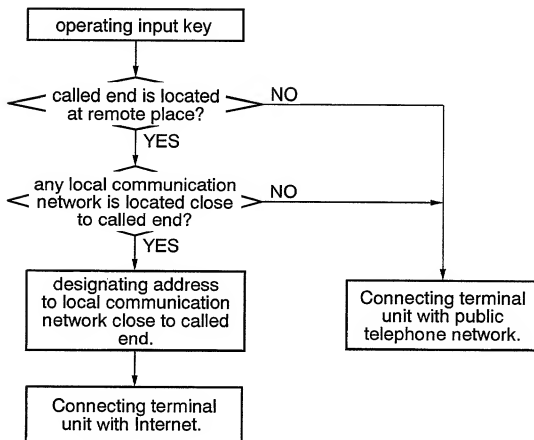


FIG. 4(b)

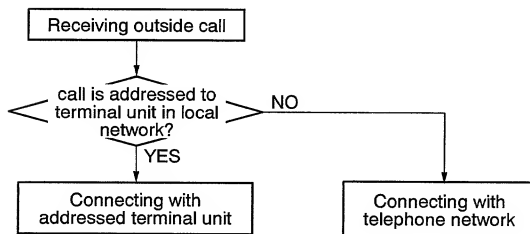


FIG. 5

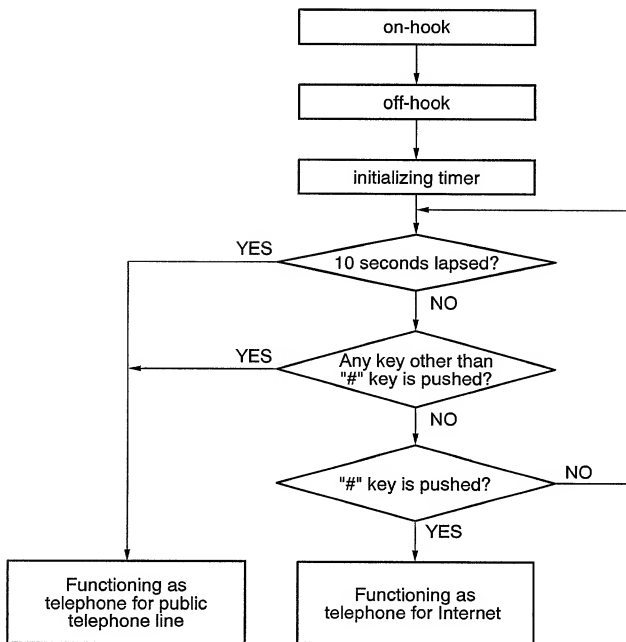


FIG. 6

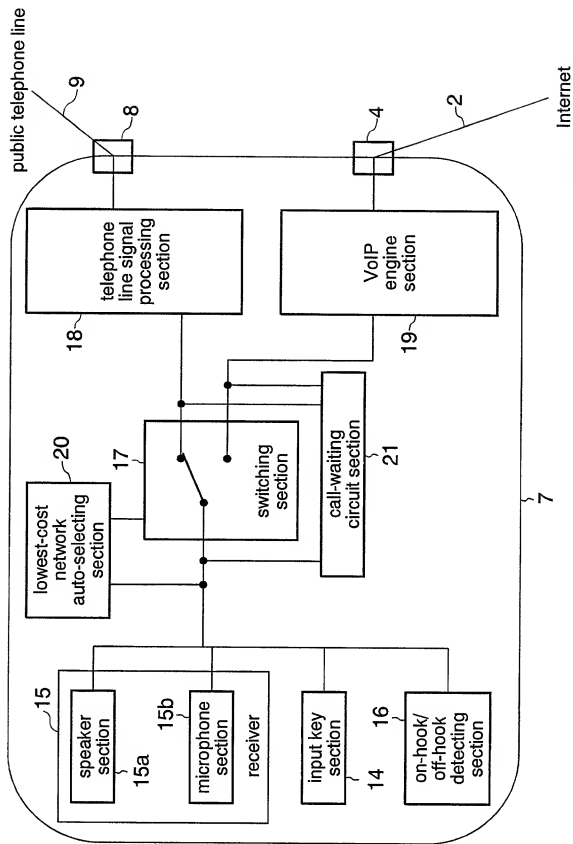


FIG. 7

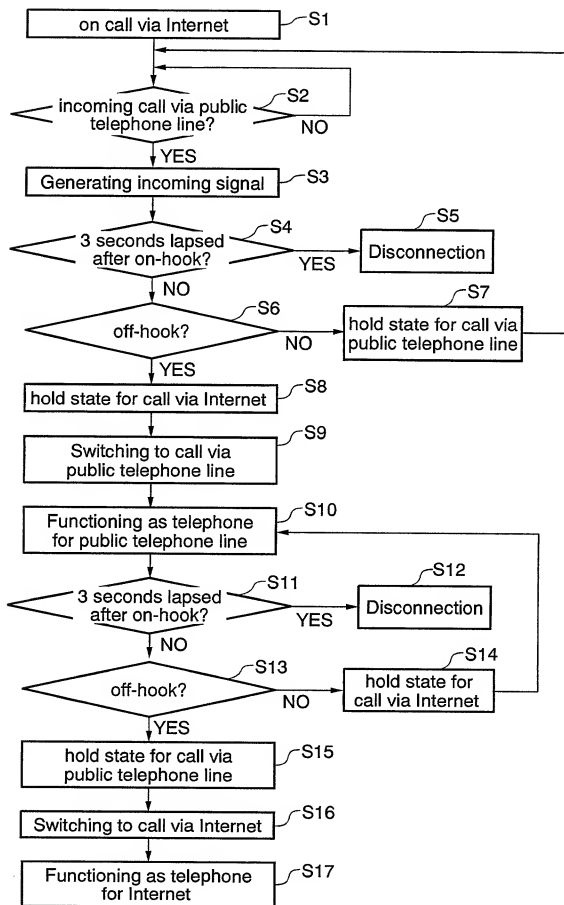


FIG. 8

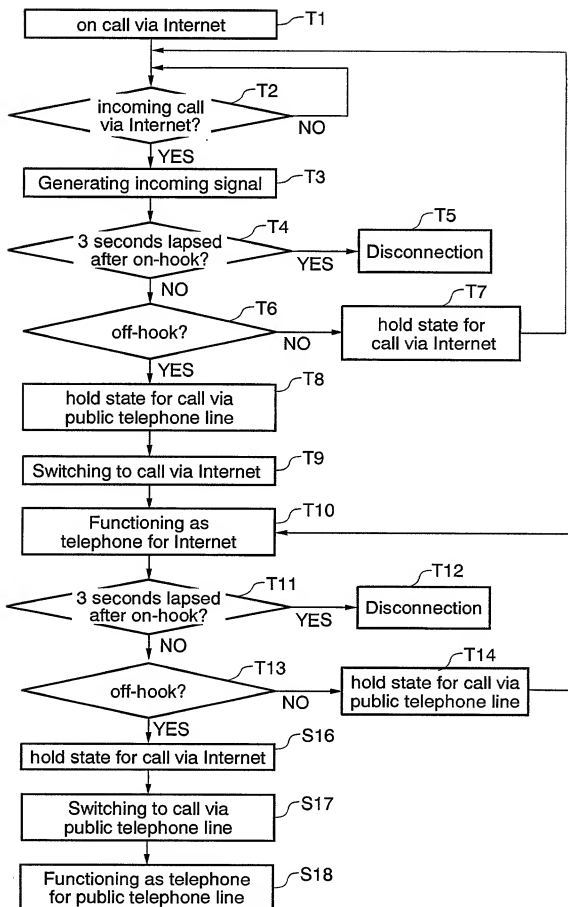


FIG. 9

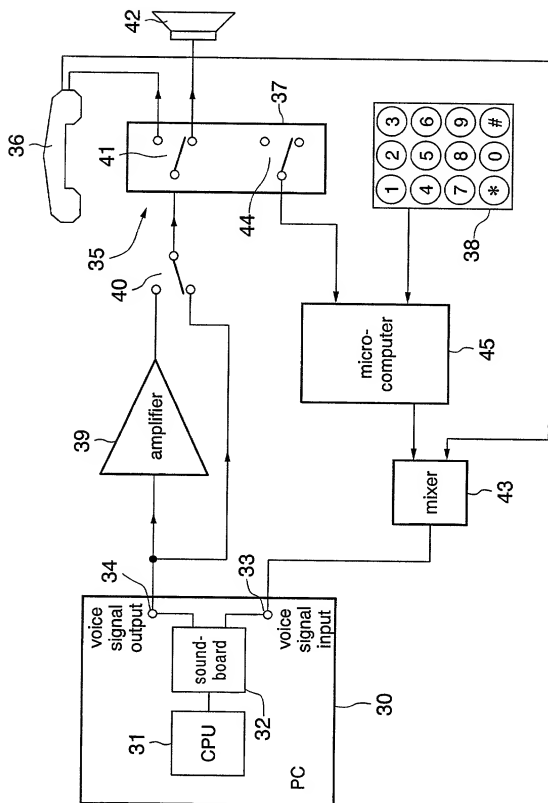


FIG. 10

receiver set		PC application		call end
operation	operation/state	operation	operation/state	
off-hook	transmitting off-hook signal to AudioIN of PC			
			receiving off-hook signal/performing off-hook (transmitting) processing/transmitting dial tone to AudioOUT	
dial push	hearing dial tone from receiver transmitting DTMF to AudioIN			
	stopping dial tone		receiving and storing DTMF/ stopping transmission of dial tone	
		click calling button	calling called end/transmitting RBT to AudioOUT	
	hearing RBT from receiver			on calling
			stopping RBT	responding
	stopping RBT			
	on call ←			→ on call

calling operation

FIG. 11

receiver set		PC application		called end
operation	operation/state	operation	operation/state	
			transmitting calling sound from AudioOUT	calling operation
	transmitting speaker sound and calling sound			
off-hook	transmitting off-hook signal to AudioIN of PC			
			receiving off-hook signal/performing off-hook (responding) processing / performing responding operation to called end/stopping calling sound	
	stopping calling sound/on call			→ on call

calling operation